



AES DRILLING FLUIDS

BENEFITS

- Reduces metal-to-metal and metal-to-formation torque and drag without affecting drilling fluid properties
- Engineered for water-based systems to perform at low concentrations

APPLICATIONS


- Water-based drilling fluids
- Coiled tubing and wireline operations
- Typical treatments range from 1-3% v/v in a continuous circulating system - add in 0.5% v/v increments

PHYSICAL PROPERTIES

- Appearance: Dark amber liquid
- Specific Gravity: 0.90 - 0.91
- Flash Point: 187°F
- Solubility: Insoluble in water

ENERLUBE[†]

ENERLUBE is specialty lubricant for water-based drilling fluids. ENERLUBE is readily dispersible and designed to minimize the risk of cheesing and greasing.

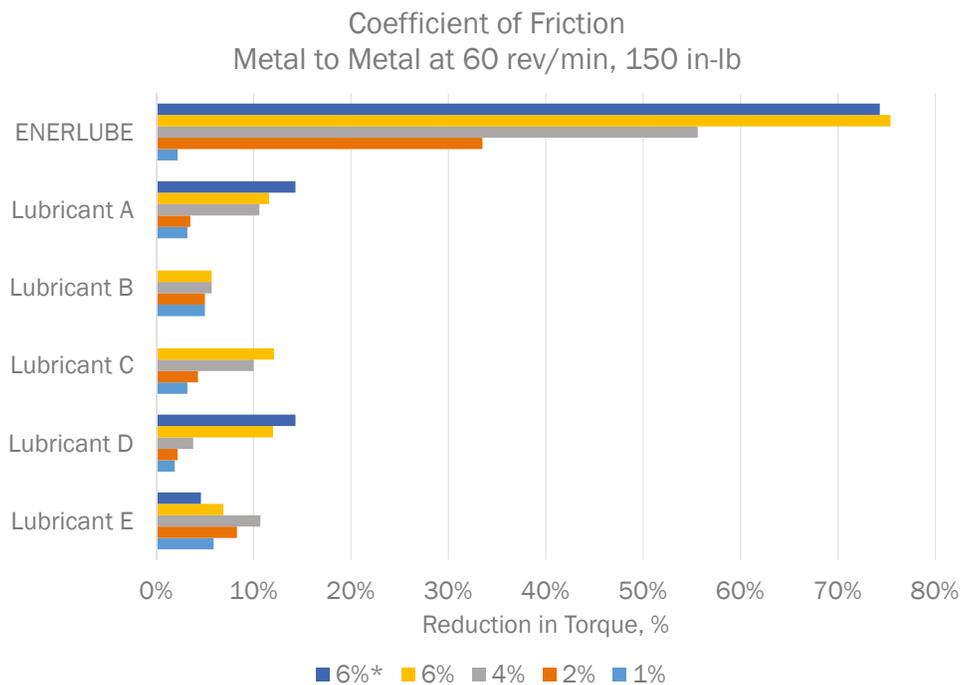

Coefficient of friction data comparison between ENERLUBE and competing lubricants across various concentrations. *Reading after 16 hour hot roll at 250°F.

Treatment Recommendations


ENERLUBE is a liquid additive added to a full circulating system or in concentrated pills. A standard circulating system recommended treatment is up to 3% v/v, adding ENERLUBE in 0.5% v/v increments until torque reduction levels.

Concentrated pills of up to 6% v/v are effective across difficult sections of excessive torque and drag, such as the build section during trips, while running casing or while sliding in highly deviated boreholes. Review these applications with technical services before use.

As with any fluid additive introduction, pilot testing is recommended for new applications.

Packaging and Handling

ENERLUBE is available in 275 gallon totes. Handle ENERLUBE as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS). ENERLUBE will oil-wet surfaces and make them slippery. Use caution if spilled and clean immediately.

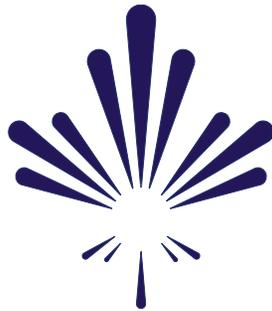

AES DRILLING FLUIDS

www.aesfluids.com

info@aesfluids.com

888-556-4533

Revision 1.01

© 2017 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. *Marks of AES Drilling Fluids, LLC.

