

ENERMUL II†



BENEFITS

Enhances emulsion to reduce fluid loss

Supplements oil-wetting in combination with ENERWET†



APPLICATIONS

Part of the EnerREACH system in conjunction with EnerREACH additives or as a supplement to conventional invert emulsion systems


0.4 - 1.0 gal/bbl (typical) for most applications



PHYSICAL PROPERTIES

- Appearance: Dark amber liquid
- Specific Gravity: 0.872
- Flash Point: 200°F

ENERMUL II is a secondary emulsifier for the EnerREACH† drilling fluid system to further reduce fluid loss and enhance emulsion properties.

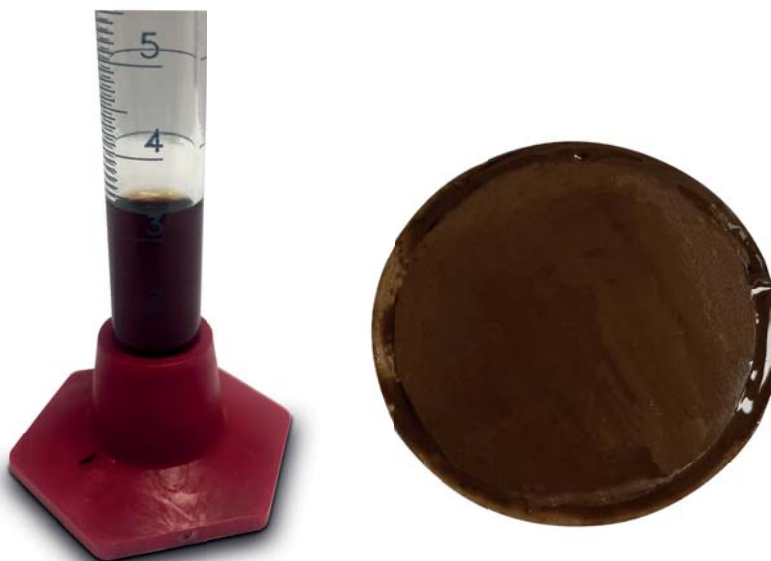

Filter cake (right) and filtrate (left) of EnerREACH system using ENERMUL II as secondary emulsifier at 250°F. As part of a properly designed EnerREACH system, ENERMUL II provides tighter filtration control and emulsion stability.

TREATMENT RECOMMENDATIONS

Typical concentrations range from 0.4 to 1 gal/bbl for most applications and mixes easily with minimal agitation.

PACKAGING AND HANDLING

ENERMUL II is available in 55 gal drums and 275 gal totes. Handle ENERMUL II as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS).



AES DRILLING FLUIDS

www.aesfluids.com

☎ Phone : 281 556 5628

✉ Email : info@aesfluids.com

© 2020 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. †Marks of AES Drilling Fluids, LLC.

Revision 1.00

