

# ES-RM<sup>†</sup>



## BENEFITS

- Provides shear thinning profile
- Provides a high yield point and low plastic viscosity
- Enhances solids suspension and carrying capacity



## APPLICATIONS

Concentrations usually range between 2 - 3 lb/bbl in the active system


- Typically added at a 10:1 ratio of ES-VIS<sup>†</sup> to ES-RM when treating
- Pilot testing will aid to determine the appropriate concentration for a specific scenario



## PHYSICAL PROPERTIES

- Appearance: Off white powder
- Specific Gravity: 2.2 - 2.6

ES-RM is a mixed metal hydroxide (MMH) additive that provides the EnerSEAL<sup>†</sup> system with its unique rheological profile.

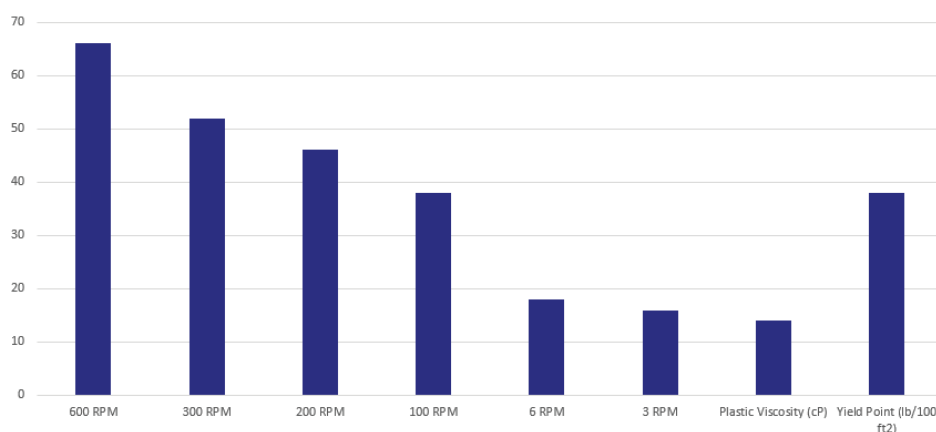

EnerSEAL example rheological profile measured at 120°F during a drilling application when used in conjunction with ES-VIS at a 10:1 ratio of ES-VIS to ES-RM

## TREATMENT RECOMMENDATIONS

Typical concentrations of 2 to 3 lb/bbl are sufficient for most applications. When treating the EnerSEAL system, maintain a 10:1 ratio of ES-VIS to ES-RM.

Pilot testing recommended to determine the appropriate concentration for a specific scenario.

## PACKAGING AND HANDLING

ES-RM is available in 25 lb sacks. Handle ES-RM as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS).



# **AES DRILLING FLUIDS**

[www.aesfluids.com](http://www.aesfluids.com)

☎ Phone : 281 556 5628

✉ Email : [info@aesfluids.com](mailto:info@aesfluids.com)

© 2020 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. †Marks of AES Drilling Fluids, LLC.

Revision 1.00

