

# EnerSEAL<sup>†</sup> Mixed Metal Hydroxide System Controls Losses, Securing the Well



## CHALLENGES

Control losses in the Cherry Canyon and Brushy Canyon formations (known for losses)

Avoid short-setting of casing or loss of well



## SOLUTION

EnerSEAL MMH system to minimize fluid invasion into known loss-prone areas

Drill surface with EnerSEAL to control surface losses. Drill salt in the intermediate with brine and displace to EnerSEAL prior to entering challenging formations.




## RESULTS

- Reached total depth without issues
- Casing set at planned depth and cemented with no losses, securing the well

## OVERVIEW

An operator in Reeves County noted a number of offset wells with uncontrollable losses while drilling the Cherry Canyon and Brushy Canyon formations, resulting in stuck pipe, short-set casing, and well abandonment. The operator requested a fluid solution to prevent losses and lower the risk of well failure.

AES recommended EnerSEAL for its unique properties that make it an ideal system for lost-circulation prone areas. As fluid moves away from the wellbore, it reaches areas of lower and lower shear. In these low shear zones, EnerSEAL is extremely thick, limiting the ability for fluid to invade further into the formation.

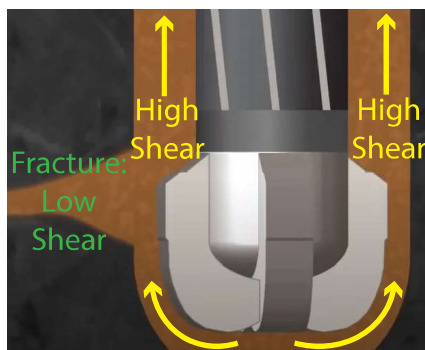


EnerSEAL mitigates losses as it becomes thicker at low shear, such as near fractures, slowing or eliminating lost circulation in troublesome zones such as the Brushy Canyon and Cherry Canyon formations

Both surface and intermediate sections were drilled with only seepage losses. The intermediate section featured a trouble-free casing run and zero losses cementing.

## DETAILS

The 17 ½" hole section was drilled maintaining a mud weight between 8.6 and 9.3 lbm/gal using API 120 screens and the centrifuge to control solids. With the 13 ⅝" surface casing set, the 12 ¼" section commenced using field brine to drill through the salt layer, minimizing washout. After clearing the salt, the well was displaced to the EnerSEAL system once again to complete the interval using a 9.0 - 9.1 lbm/gal mud weight.

### EnerSEAL Rheology Readings at 120°F

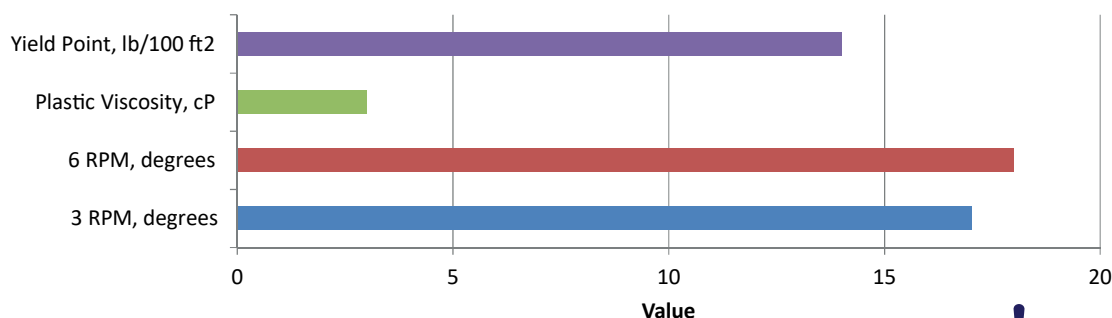

Typical rheology while drilling the intermediate section with EnerSEAL



**AES DRILLING FLUIDS**

[www.aesfluids.com](http://www.aesfluids.com)

☎ Phone : 281 556 5628

✉ Email : [info@aesfluids.com](mailto:info@aesfluids.com)

© 2020 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. †Marks of AES Drilling Fluids, LLC.

Revision 1.00

