

ABS MUL HT[†]

SUPPLEMENTARY SECONDARY EMULSIFIER FOR HIGH TEMPERATURE APPLICATIONS

BENEFITS

- Performs at temperatures up to 450°F.
- Use in conjunction with other primary emulsifiers, such as ABS MUL.
- Effective at low concentrations.

APPLICATIONS

- Performs as part of the ABS 40 system and other invert emulsion drilling fluid systems.
- 0.5 - 1.0 gal/bbl (typical) alongside primary emulsifier treatment.

PROPERTIES


- Appearance: Dark amber liquid
- Specific Gravity: 0.93
- Flash Point: >250°F

TREATMENT RECOMMENDATIONS

Typical concentrations of 0.5 - 1.0 gal/bbl are sufficient for most applications. ABS MUL HT is a high temperature emulsifier that extends conventional emulsifiers. Add it in conjunction with the recommended conventional emulsifier for best performance.

PACKAGING AND HANDLING

ABS MUL HT is available in 275 gallon totes. Handle ABS MUL HT as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS).

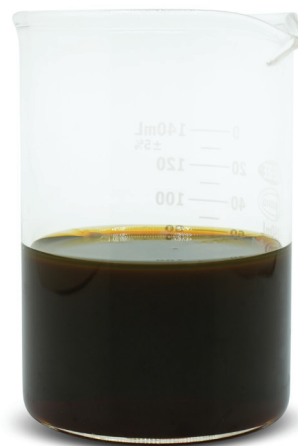



AES DRILLING FLUIDS

www.aesfluids.com

© 2026 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. †Marks of AES Drilling Fluids, LLC.

Revision 1.01