

DEFOAMEX SB II[†]

SILICONE-BASED DEFOAMER

BENEFITS

- Reduces foaming/entrained air throughout the circulating system to aid in stable pump pressures.
- Effective in low concentrations in brine and water-based systems.
- Mixes easily.

APPLICATIONS

- 0.7 - 7.0 gallons per 100 barrels (typical) for most applications.
- Can be added directly to active pit.

PROPERTIES


- Appearance: White viscous liquid
- Specific Gravity: 1.04 - 1.08

TREATMENT RECOMMENDATIONS

DEFOAMEX SB II may be added directly to the system. Typical concentrations range between 0.7 to 7.0 gallons per 100 barrels for most applications.

PACKAGING AND HANDLING

DEFOAMEX SB is available in 5 gallon pails and 55 gallon drums. Handle DEFOAMEX SB as an industrial chemical, wearing protective equipment and observing precautions as described in the Safety Data Sheet (SDS).

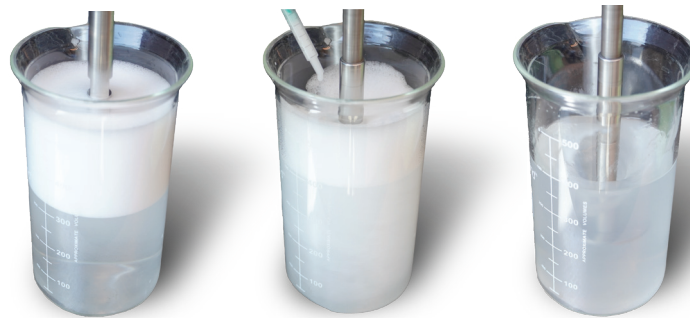

In this lab test, a brine sample demonstrates high foaming tendencies (left). A treatment of 0.05 lb/bbl DEFOAMEX SB II dramatically reduces foaming (center and right).





AES DRILLING FLUIDS

www.aesfluids.com

© 2024 AES Drilling Fluids. All rights reserved. The information provided is for informational purposes and is believed to be accurate, although this cannot be guaranteed. No guarantees or warranties are stated or implied. †Marks of AES Drilling Fluids, LLC.

Revision 1.01